

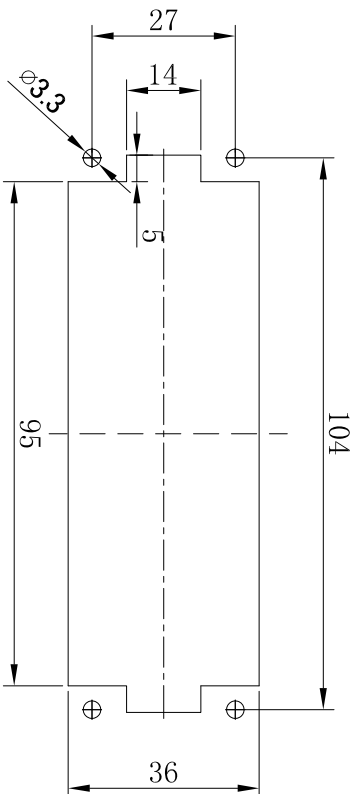
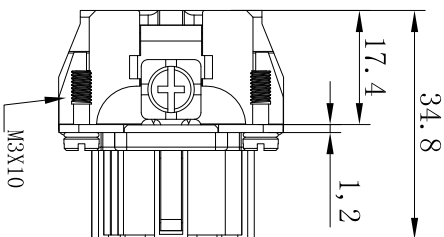


REVISIONS					1
REV	ECN	DESCRIPTION	DATE	DRAFT	

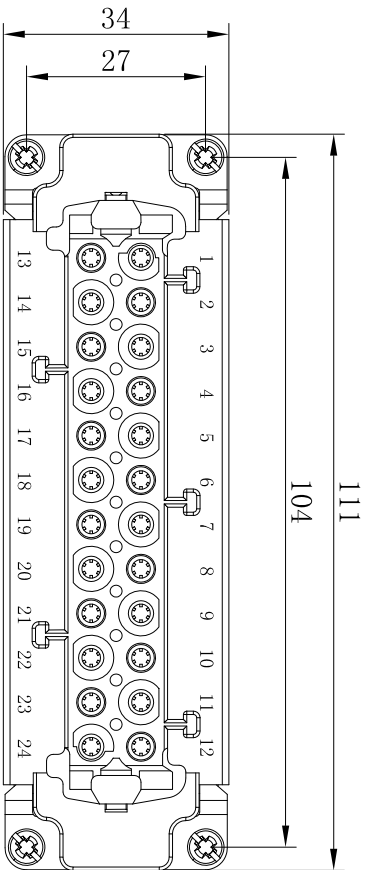

面板安装开孔图

- 技术参数:
- 插芯:
- 插针数: 24+PE
 - 额定电流: 16A
 - 额定电压: 500V
 - 额定脉冲电压: 6KV
 - 污染等级: 3
 - 依据UL/CSA额定电压: 600V
 - 绝缘电阻: $\geq 10^9 \Omega$
 - 材料: 聚碳酸酯
 - 温度范围: $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$
 - 依据UL94阻燃等级: V0
 - 可拔插次数: ≥ 500
- 插针:
- 接线方式: 螺钉连接
 - 材料: 铜合金
 - 表面处理: 镀银
 - 接触电阻: $\leq 1\text{m}\Omega$
 - 线径范围: $0.75-2.5\text{mm}^2$ (18-14 AWG)
 - 剥线长度: 7.0mm
 - 拧紧力矩: 0.5N.m

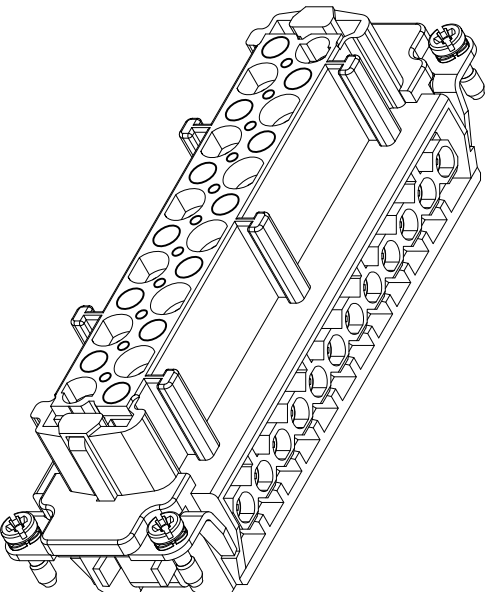

产品代号 Part Code:		图号 Drawing No:	
HE-024-F		PART NO:	
Date:	2021.04.24	Scale	REV
All Dimensions in mm Original Size DIN A 4	2:1	HK-1	Weight
浙江昊科电气有限公司 ZHEJIANG HAOKE ELECTRICAL CO., LTD		Qty	Drawn:
		Tang	SHEET
			1/1